


24V Flexiprint

Standard bright (PLCC2)

Specifications



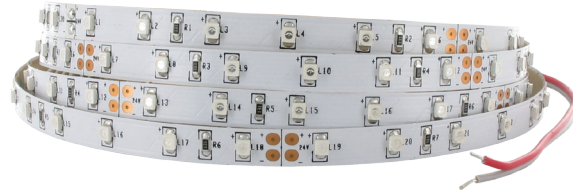





Voltage	24V
Current	1A
Wattage	4.8W/m
Number of LED's	300pcs
Length of stripe	5m
Operating temperature	-15°~+40°C
Storage temperature	-25°~+60°C
Viewing angle	110°
CE/RoHS compliant	




Benefits

Adhesive tape on backside
cuttable every ~100mm

Electrical and optical characteristics (Ta=25°C)

Part number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FP1-B01D-500	 blue	472nm	110	E
FP1-G01D-500	 green	525nm	450	C
FP1-H01D-500	 warm-white	2600-2800°K	2100	A
FP1-N01D-500	 warm-white	2800-3100°K	2100	A
FP1-R01D-500	 red	639nm	240	E
FP1-S01D-500	 natural-white	3800-5000°K	2400	A+
FP1-W01D-500	 white	5500-6700°K	2400	A+
FP1-Y01D-500	 yellow	590nm	200	E

Dimensions

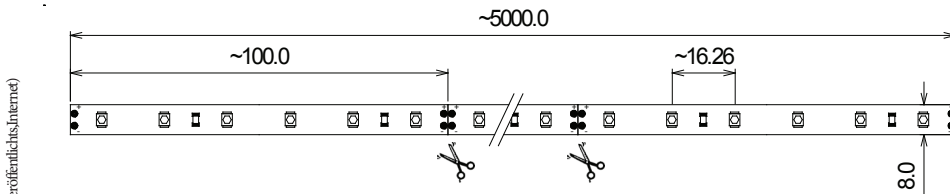

Sloan_03_CK_LED-Module_18A (derzeitverfueglich.in.ernet)

Thickness: 2.4 mm

1. All dimensions are in millimetres
2. Tolerance is ± 0.50 mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**