

24V Flexiprint

Standard bright (PLCC2) double density / dualwhite

Specifications



Voltage	24V
Current	2x1A
Wattage	2x4.8W/m
Number of LED's	2x300pcs
Length of Stripe	5m
Operating Temperature	-25°~+60°C
Storage Temperature	-40°~+80°C
Viewing Angle	110°
CE/RoHS compliant	




Benefits

Adhesive tape on backside
cutable every ~100mm

Electrical and Optical Characteristics (Ta=25°C)

Part Number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FP1-NW02D-500	 warm-white	2800-3200°K	2100	A
	 white	5500-6500°K	2400	A+
				Total: A+

Dimensions

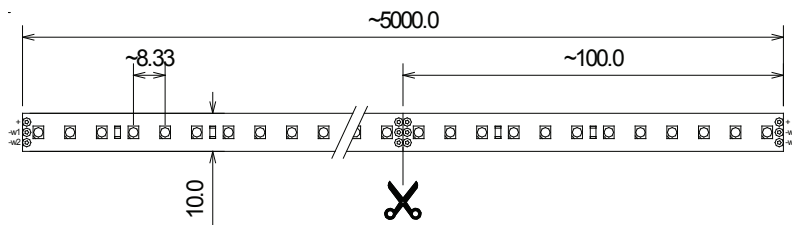

Thickness: 2.4 mm

Sloan_03_GK_LED-Modules_L5B

1. All dimensions are in millimetres
2. Tolerance is ± 0.25 mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**