


12V Flexiprint

Ultra bright (5730)

Specifications

Voltage	12V
Current	4.5A
Wattage	21.6W/m
Number of LED's	225pcs
Length of stripe	2.5m
Operating temperature	-15°~+40°C
Storage temperature	-25°~+60°C
Viewing angle	110°
CE/RoHS compliant	

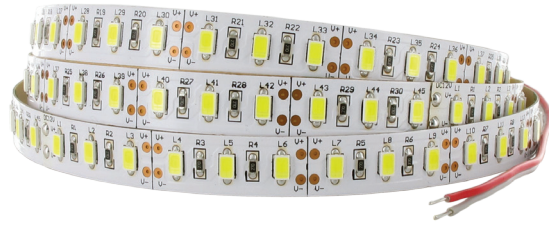


Benefits

Adhesive tape on backside
cuttable every ~33.3mm

Electrical and optical characteristics (Ta=25°C)

Part number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FP4-N01B-250	warm-white	2800-3100°K	3600	A
FP4-S01B-250	natural-white	3800-5000°K	4275	A
FP4-W01B-250	white	5500-6700°K	4275	A

Dimensions

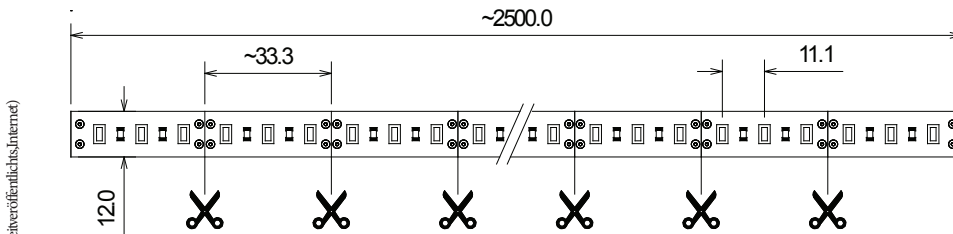

Sloan_03_GK_LED-Modul_18A(darstellendöffentlichs.Inernet)

Thickness: 2 mm +0.5

1. All dimensions are in millimetres
2. Tolerance is ±0.50mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**