


24V Flexiprint

Ultra bright (5730)

Specifications

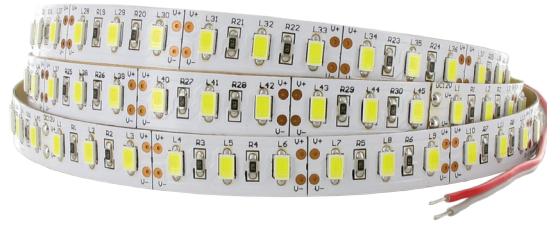


Voltage	24V
Current	3.6A
Wattage	17.28W/m
Number of LED's	420pcs
Length of stripe	5m
Operating temperature	-15°~+40°C
Storage temperature	-25°~+60°C
Viewing angle	110°
CE/RoHS compliant	




Benefits

Adhesive tape on backside
cuttable every ~84mm

Electrical and optical characteristics (Ta=25°C)

Part number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FP4-N01D-500	 warm-white	2800-3100°K	6720	A
FP4-S01D-500	 natural-white	3800-5000°K	7980	A+
FP4-W01D-500	 white	5500-6700°K	7980	A+

Dimensions

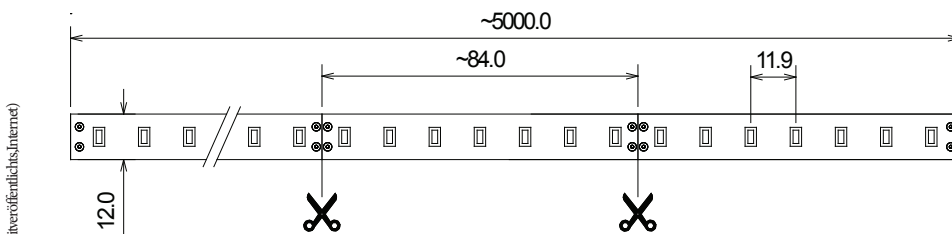

Sloan_03_CK_LED-Module_18A (derzeitverfuehrlich.internet)

Thickness: 2 mm +0.5

1. All dimensions are in millimetres
2. Tolerance is ± 0.50 mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**