

## 24V Flexiprint

Ultra high bright (2835)

### Specifications




Voltage	24V
Current	2.7A
Wattage	26W/m
Number of LED's	315pcs
Length of stripe	2.5m
Operating temperature	-15°~+40°C
Storage temperature	-25°~+60°C
Viewing angle	110°
CE/RoHS compliant	




### Benefits

Adhesive tape on backside  
cuttable every ~56mm

### Electrical and optical characteristics (Ta=25°C)

Part number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FP6-N01D-250	 warm-white	2800-3100°K	3780	B
FP6-S01D-250	 natural-white	3800-5000°K	4100	A
FP6-W01D-250	 white	5500-6700°K	4100	A

### Dimensions

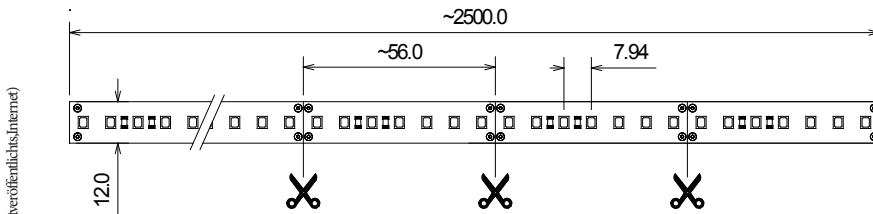

Sloan\_03\_CK\_LED-Module\_18A (derzeitverfuehrlich.is.inernet)

Thickness: 2 mm +1

1. All dimensions are in millimetres
2. Tolerance is  $\pm 0.50$ mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**