

24V Flexiprint

Standard bright (PLCC2) high density

Specifications




Voltage	24V
Current	1.88A
Wattage	18W/m
Number of LED's	570pcs
Length of stripe	2.5m
Operating temperature	-15°~+40°C
Storage temperature	-25°~+60°C
Viewing angle	110°
CE/RoHS compliant	




Benefits

Adhesive tape on backside
cuttable every ~26.3mm

Electrical and optical characteristics (Ta=25°C)

Part number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FP7-N01D-250	 warm-white	2800-3100°K	3990	A+
FP7-S01D-250	 natural-white	3800-5000°K	4560	A+
FP7-W01D-250	 white	5500-6700°K	4560	A+

Dimensions

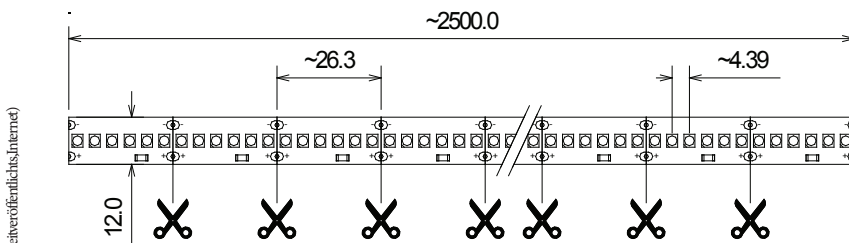

Sloan_03_CK_LED-Module_18A(darzeitverfentlichlich.inernet)

Thickness: 2 mm +1

1. All dimensions are in millimetres
2. Tolerance is ± 0.50 mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**