

# 12V Flexiprint Silicone IP64

RGB (PLCC6)

## Specifications

Voltage	12V
Current	3x1A
Wattage	14.4W/m (3x4.8W/m)
Number of LED's	150pcs
Length of Stripe	2.5m
Operating Temperature	-25°~+60°C
Storage Temperature	-40°~+80°C
Viewing Angle	110°
CE/RoHS compliant	




## Benefits

Adhesive tape on backside  
IP64 Protection

## Electrical and Optical Characteristics (Ta=25°C)

Part Number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FPL-F02B-250	<span style="color: red;">●</span> red	624nm	120	D
	<span style="color: green;">●</span> green	518nm	230	B
	<span style="color: blue;">●</span> blue	471nm	55	E
				Total: E

## Dimensions

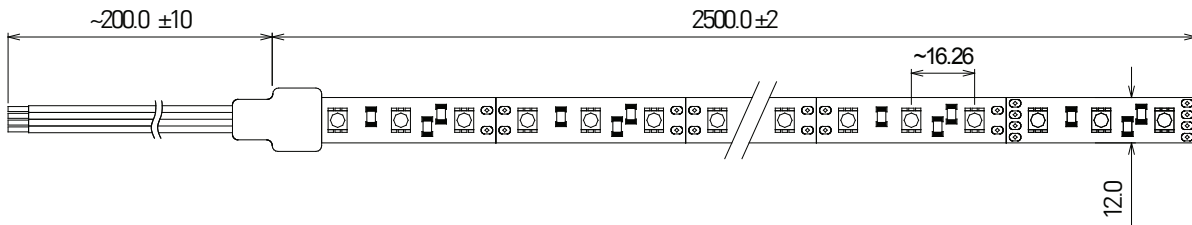

Sloan\_03\_GK\_LED-Modules\_15B

Thickness: 3 mm +1  
Thickness endings: 4 mm

not designed for submersion or outdoor usage  
IP protection is no longer applicable after cutting

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**