

24V Flexiprint

RGBW (PLCC6) & (2835)

Specifications









Voltage	24V
Current	2.4A (3x400mA, 1x1200mA)
Wattage	23W/m (3x3.84W/m, 1x11.5W/m)
Number of LED's	240pcs (120pcs RGB, 120pcs white)
Length of Stripe	2.5m
Operating Temperature	-15°~+40°C
Storage Temperature	-40°~+80°C
Viewing Angle	110°
CE/RoHS compliant	




Benefits

Adhesive tape on backside
IP64 Protection

Electrical and Optical Characteristics (Ta=25°C)

Part Number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FPL-FW02D-250	 red	617-627nm	96	C
	 green	515-525nm	180	B
	 blue	464-474nm	43	E
	 white	5500-6500K	2040	A
				Total: B
FPL-FN02D-250	 red	620-625nm	96	C
	 green	520-525nm	180	B
	 blue	465-470nm	43	E
	 warm-white	2800-3200K	1850	A
				Total: B

Dimensions

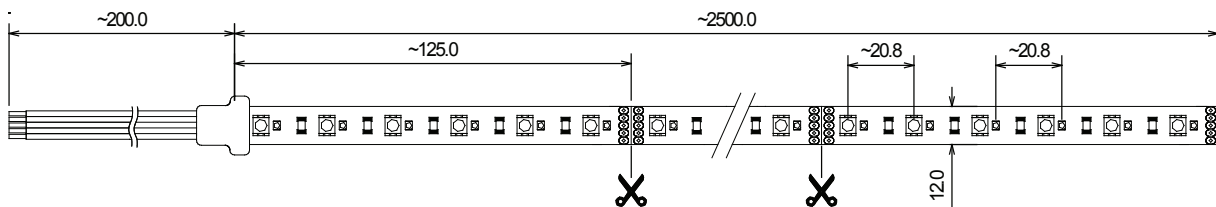

Thickness: 3 mm +1
Thickness endings: 4 mm

Sloan_03_GK_LED-Modules_L5B

1. All dimensions are in millimetres
2. Tolerance is ± 0.25 mm unless otherwise specified
3. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**