

Through hole LED

- flashing frequency 2.5-1.5Hz
- power dissipation 200mW
- RoHS compliant

∅ 3mm Flashing



Part Number	Peak Wavelength	Intensity (mcd)		Angle (deg)	Voltage (V)		Lens Colour	Type
		min	max		min.	max		
L3-G3FF	565nm	5	20	60°	3.5	13	green diffused	1
L3-R3FF	625nm	12.5	32	60°	3.5	13	red diffused	1
L3-Y3FF	590nm	5	20	60°	3.5	135	white diffused	1


Electro-Optical-Characteristics Ta=25°C, Forward Current: IF Typical = 38-56mA,
Storage Temp. -50 ~+100 (°C) Operating Temp. -40 ~+70 (°C)

Detailed data sheets are available on request

Packaging: 500pcs/bulk

Dimensions (mm)

Type	A	B	C	D	E
1	4.0	5.0	NA	32.0	4.0

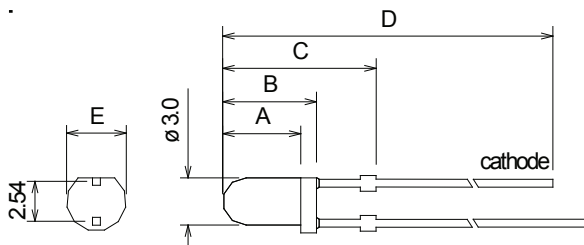

Sloan_04_GK_LED_14A

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
2. Specifications are subject to change without notice