

Through hole LED

∅ 3mm green

- high luminosity
- long lifetime up to 75'000 hours
- high quality for professional application
- RoHS compliant



Part Number	Peak Wavelength	Intensity (mcd)			Angle (deg)	Voltage (V)		Lens Colour	Type
		min	typ	max		typ	max		
L3-G41N-GVW	● 525nm	24640	34800	49500	15°	3.2	3.6	waterclear	1
L3-G51N-GUV	● 525nm	7400	-	14000	30°	-	3.6	waterclear	2
L3-G310-1	● 555	10	20	40	20°	2.1	2.8	waterclear	3
L3-G301	● 568	30	40	50	40°	2.2	2.6	green diffused	4

Electro-Optical-Characteristics Ta=25°C, Forward Current: IF Typical = 20mA,

1/10 Duty Cycle, 10ms Pulse Width: up to 110mA, depending on type number.


Storage Temp. -40 ~+100 (°C) Operating Temp. -30 ~+85 (°C)

Detailed data sheets are available on request

Packaging: 500pcs/bulk

Dimensions (mm)

Type	A	B	C	D	E
1	5.0	6.0	11.0	27.5	3.8
2	4.4	5.4	10.4	26.9	3.8
3	4.0	4.7	NA	32.0	3.8
4	4.5	5.3	NA	30.7	3.8

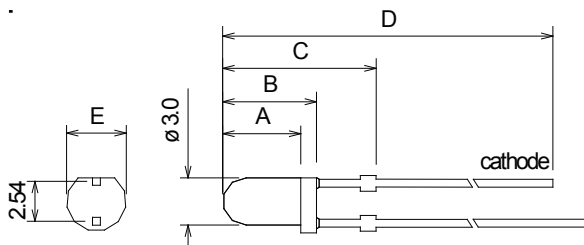

Sloan_04_GK_LED_14A

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
2. Specifications are subject to change without notice