

Through hole LED

∅ 3mm yellow

- high luminosity
- long lifetime up to 75'000 hours
- high quality for professional application
- RoHS compliant



Part Number	Peak Wavelength	Intensity (mcd)			Angle (deg)	Voltage (V)		Lens Colour	Type
		min	typ	max		typ	max		
L3-Y33U	592nm	2100	4200	-	14°	2.50	2.6	waterclear	1
L3-Y32U	592nm	1100	2200	3080	35°	2.25	2.6	waterclear	1
L3-Y41Q	592nm	1000	2500	4000	24°	2.00	2.6	waterclear	1
L3-Y30U	592nm	600	1200	-	40°	2.00	2.4	waterclear	2
L3-Y310-1	580nm	20	40	56	20°	2.20	2.8	waterclear	3
L3-Y301	585nm	20	30	40	40°	2.10	2.6	yellow diffused	4

Electro-Optical-Characteristics Ta=25°C, Forward Current: IF Typical = 20mA,

1/10 Duty Cycle, 10ms Pulse Width: up to 110mA, depending on type number.


Storage Temp. -40 ~+100 (°C) Operating Temp. -30 ~+85 (°C)

Detailed data sheets are available on request

Packaging: 500pcs/bulk

Dimensions (mm)

Type	A	B	C	D	E
1	4.3	5.3	NA	29.7	3.8
2	3.4	4.4	NA	28.8	3.1
3	4.0	4.7	NA	32.0	3.8
4	4.5	5.3	NA	30.7	3.8

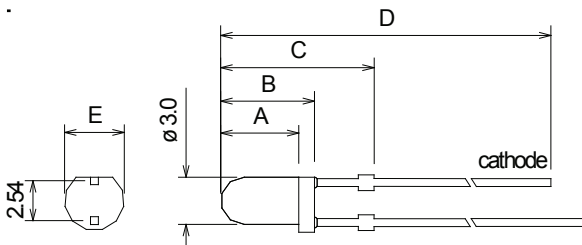

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
2. Specifications are subject to change without notice