




## Through hole LED

- flashing frequency 2.5-1.5Hz
- power dissipation 200mW
- RoHS compliant

∅5mm Flashing



Part Number	Peak Wavelength	Intensity (mcd)		Angle (deg)	Voltage (V)		Lens Colour	Type
		min	max		min	max		
L5-G5FF	 565nm	5	32	60°	3.5	13	green diffused	1
L5-R5FF	 625nm	20	80	60°	3.5	13	red diffused	1
L5-Y5FF	 590nm	5	32	60°	3.5	13	white diffused	1


**Electro-Optical-Characteristics** Ta=25°C, Forward Current: IF Typical = 38-56mA,  
Storage Temp. -50 ~+100 (°C) Operating Temp. -40 ~+70 (°C)

Detailed data sheets are available on request

Packaging: 500pcs/bulk

## Dimensions (mm)

Type	A	B	C	D	E
1	7.6	8.6	NA	35.6	5.9

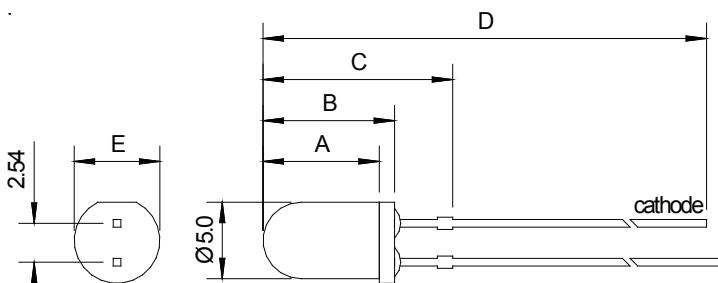

Sloan\_04\_GK\_LED\_14A

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
2. Specifications are subject to change without notice