

SLOAN AG
 Birnmannsgasse 8
 CH-4009 Basel
 Switzerland
 Tel.: +41 (0) 61 264 10 60
 Fax: +41 (0) 61 264 10 75
 E-Mail: sloan@sloan-basel.com
 www.sloan-basel.com

Indicator lights for p.c. boards

Holder for single or in-line mounting,
 standard grid 2.54 mm.
 LED T1 not exchangeable.

C71





Signalleuchten für Leiterplatten

Fassung für Einzel- oder Reihenmontage,
 Raster 2.54 mm.
 LED T1 nicht auswechselbar.

Voyants lumineux pour circuits imprimés

Supports avec possibilités de montage simple
 ou encastré en ligne, pas 2.54 mm.
 LED T1 non remplaçable.

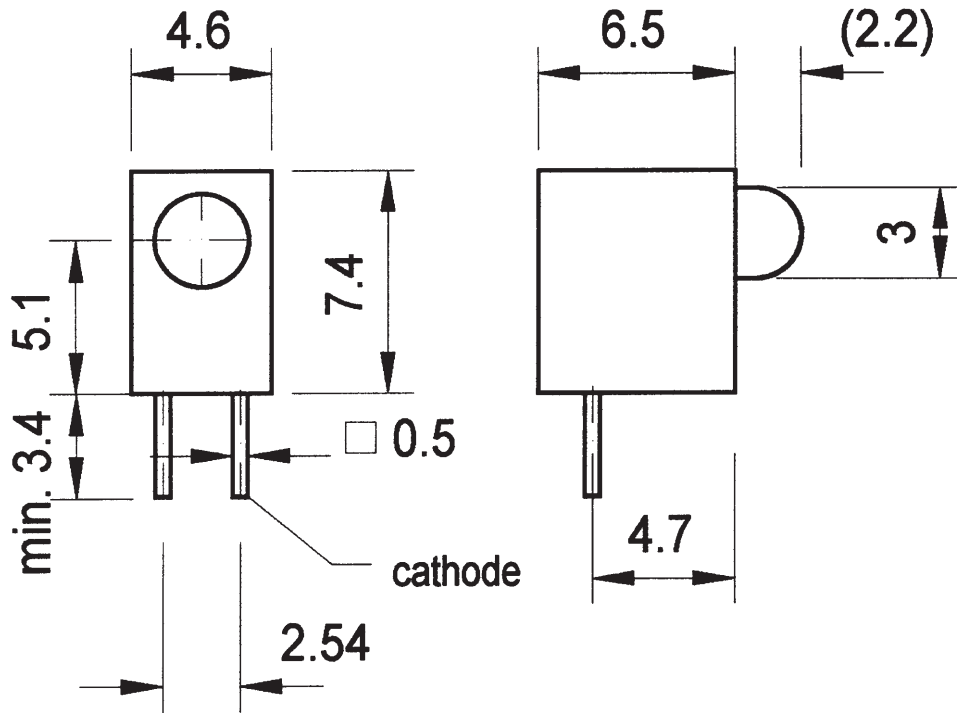

LED Characteristics

SLOAN part no.	Chip			Absolute Maximum Ratings				Electro-optical Data			Test cond.	Viewing Angle (deg)
	Emitted Color	Peak wave length (nm)	Lens appearance	$\Delta\lambda$ (nm)	PD (mW)	IF (mA)	Peak If (mA)	VF (V)		IV Typ (mcd)		
								Typ.	Max.			
L3-Y221	yellow	585	yellow diffused	35	100	30	150	2.1	2.6	60	If (mA)	2 Θ 1/2
L3-R221	superred	635	red diffused	45	100	30	150	2.0	2.6	40		
L3-A221	superorange	610	orange diffused	35	100	30	150	2.0	2.6	70		
L3-G221	supergreen	568	green diffused	30	100	30	150	2.2	2.6	70		
L3-R211	superred	700	waterclear	90	50	15	50	2.2	2.6	60		
L3-R21B	superred	635	waterclear	45	100	30	150	2.0	2.6	100		

Order code: C71R2210, red
 C71G2210, green
 C71Y2210, yellow
 C71A2210, orange

Réserve de modifications de toutes les données techniques
 Änderungen die dem technischen Fortschritt dienen, sind vorbehalten
 Specifications subject to change without notice