

## White based 3mm LEDs


- easy replacement of Wedge Base W2.0 x 4.6d filament bulbs
- other colour and voltage on request
- RoHS compliant

## Wedge Base W2.0 x 4.6d



Part Number	Emitted colour	Electro-optical characteristics Ta = 25°C / 20mA				CIE	Epoxy
		Voltage U[V]	mcd min	mcd max	Directivity 2Θ½		
WB4.6-W37NBVWA	white	5V	9480	18960	20°	0.31/0.32	clear
WB4.6-W36NBVWA	white	5V	4610	9220	50°	0.31/0.32	clear
WB4.6-W32NBVWA	white	5V	2520	5040	60°	0.31/0.32	diffused
WB4.6-W37NBVWB	white	12V	9480	18960	20°	0.31/0.32	clear
WB4.6-W36NBVWB	white	12V	4610	9220	50°	0.31/0.32	clear
WB4.6-W32NBVWB	white	12V	2520	5040	60°	0.31/0.32	diffused
WB4.6-W37NBVWM	white	24V*	9480	18960	20°	0.31/0.32	clear
WB4.6-W36NBVWM	white	24V*	4610	9220	50°	0.31/0.32	clear
WB4.6-W32NBVWM	white	24V*	2520	5040	60°	0.31/0.32	diffused

\* I<sub>F</sub> = 16mA

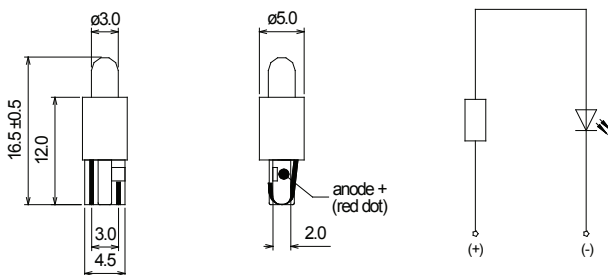

Sloan\_02\_GK\_BaseLED\_14A

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
3. Specifications are subject to change without notice