
Indicator lights with reflector
Rotation-proof
Option: waterproof IP64 / IP67 / IP68

Signalleuchten mit Reflektor
Verdrehsicher
Option: wasserdicht IP64 / IP67 / IP68

Voyants lumineux avec réflecteur
Anti-rotation
Option: étanche IP64 / IP67 / IP68

Series 353 / 354 / 358



3D Step-file
available on request



abgeflachte Seite = Kathode
flat side = cathode
côté plat = cathode



3548S1R521B




358811010Y501B

Further specifications and options in section „F-H" / Weitere Spezifikationen und Optionen in Kapitel „F-H" / Autres spécifications et options au chapitre „F-H"


Type / Typ / Type

Terminals
Anschlüsse
Raccords


353



354



358

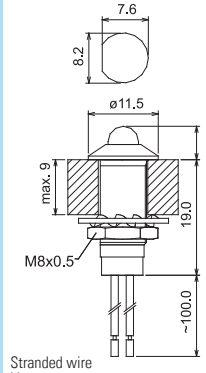

Body / Körper / Corps

Protection Schutzart Protection		Surface Oberfläche Surface	
4	IP64	**B**	Brass, blackened Messing, geschwärzt Laiton, noirci
7	IP67	**S**	Brass, nickel plated Messing, vernickelt Laiton, nickelé
8	IP68	**5**	Stainless steel Edelstahl Acier inoxydable
		6	Stainless steel, blackened Edelstahl, geschwärzt Acier inoxydable, noirci
		9	Brass, olive drab** Messing, olivebraun** Laiton, olivebrun**

Accessories Zubehör Accessoires

1		
5		Stainless steel 1.4305 Edelstahl 1.4305 Acier inoxydable 1.4305

Type / Typ / Type

Terminals
Anschlüsse
Raccords

Body / Körper / Corps

Protection Schutzart Protection		Surface Oberfläche Surface	
4	IP64	**1**	Brass, blackened Messing, geschwärzt Laiton, noirci
7	IP67	**2**	Brass, nickel plated Messing, vernickelt Laiton, nickelé
8	IP68	**5**	Stainless steel Edelstahl Acier inoxydable
		6	Stainless steel, blackened Edelstahl, geschwärzt Acier inoxydable, noirci
		9	Brass, olive darb** Messing, olivebraun** Laiton, olivebrun**

Accessories Zubehör Accessoires

1		
5		Stainless steel 1.4305 Edelstahl 1.4305 Acier inoxydable 1.4305

Lenght Länge Longueur

010	Standard 100 mm Other lengths on request Andere Längen auf Anfrage Autres longueurs sur demande

Light source Lichtquelle Source lum.

LED Ø 5mm

Y54U 7'000 mcd **Y50U** 3'000 mcd **Y501** 500 mcd	Yellow Gelb Jaune	
B91G 9'000 mcd **B21G** 2'120 mcd **B61G** 1'160 mcd	Blue Blau Bleu	
G81N 32'500 mcd **G71N** 6'500 mcd **G501** 250 mcd	Green Grün Vert	
R54U 7'000 mcd **R50U** 3'000 mcd **R521** 80 mcd	Red Rot Rouge	
W55N 22'000 mcd **W50N** 2'320 mcd	White Weiss Blanc	
RGKW common cathode only series 353, 358 **RGVW** common anode only series 353, 358	Red-Green Rot-Grün Rouge-Vert	

Voltage Spannung Tension

Code	V	mA
0 series 353, only available without resistor	without ohne sans	
CL constant current driver only for series 354, 358 and only for single colour	29-48	20
CL1 constant current driver only for series 354, 358 and only for single colour	5-28	20
Z only for series 358*	230	2.5

other voltage and ranges on request.

Operating Temperature -30° to +85°C / Storage Temperature: -40° to +100°C / 230V Operating Temperature -30° to +65°C

RoHS compliant / ** except surface option 9 (none RoHS)

Specifications are subject to change without notice – Änderungen die dem technischen Fortschritt dienen, sind vorbehalten – Réserve de modifications de toutes les données techniques

different LED's of the SLOAN range can be built in

*refer to installation instructions for 230V version in chapter „G"

35..

SIBALCO AG • Birmannsgasse 8 • CH-4055 Basel • Tel. +41 (0)61 264 10 10 • Fax +41 (0)61 264 10 15 • info@sibalco.ch • www.sloan.ch