


12V Flexiprint

RGB (PLCC6)

FP-F01B-500

Specifications

Voltage	12V
Current	3x1A
Wattage	7.2W/m (3x2.4W/m)
Number of LED's	150pcs
Length of stripe	5m
Operating temperature	-15°~+40°C
Storage temperature	-25°~+60°C
Viewing angle	110°
CE/RoHS compliant	

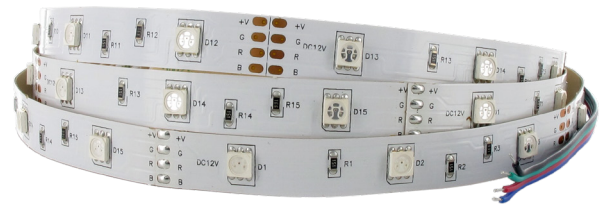


Benefits

- Adhesive tape on backside
- Cutable every ~100mm

Electrical and optical characteristics (Ta=25°C)

Part number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FP-F01B-500	red	624nm	120	D
	green	518nm	230	B
	blue	471nm	55	E
			Total:	E


Dimensions

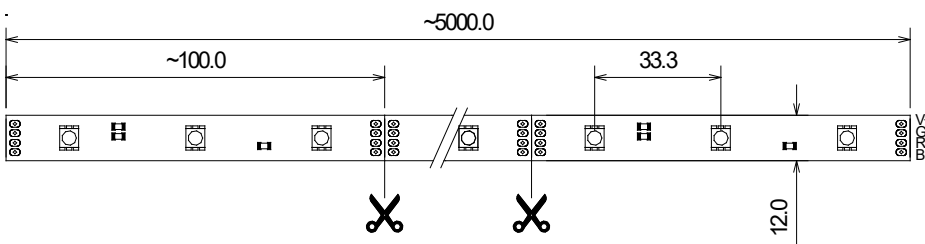

Thickness: 2.1 mm

Additional:

Quick connector for a solderless connection with the LED stripe.
Part-no.: SLO-C310-00006 (more details on page 47)

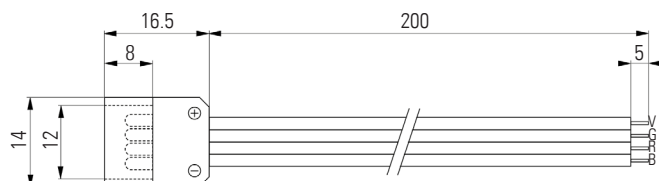

- All dimensions are in millimetres
- Tolerance is ±0.50mm unless otherwise specified
- Length tolerance ±1%
- Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**