


Flexiprint IP20

5730, single colour, ultra bright

FP4-x01B-250

Specifications

Voltage	12V
Current	4.5A
Wattage	21.6W/m
Number of LEDs	225pcs
Length of stripe	2.5m
Viewing angle	120°
Min. bending radius (edges/corners)	30mm
Operating temperature	-15 to +40°C
Storage temperature	-25 to +60°C
CE/RoHS compliant	

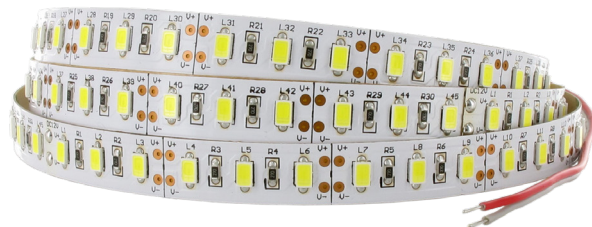


Benefits

Adhesive tape on backside
Cutttable every ~33.3mm

Electrical and optical characteristics (Ta=25°C)

Part number	Colour	CCT	Intensity lm/m	EEC
FP4-N01B-250	 warm-white	2800-3500°K	2170	F
FP4-S01B-250	 natural-white	3800-5000°K	2260	F
FP4-W01B-250	 cold-white	5500-7000°K	2260	F

Dimensions

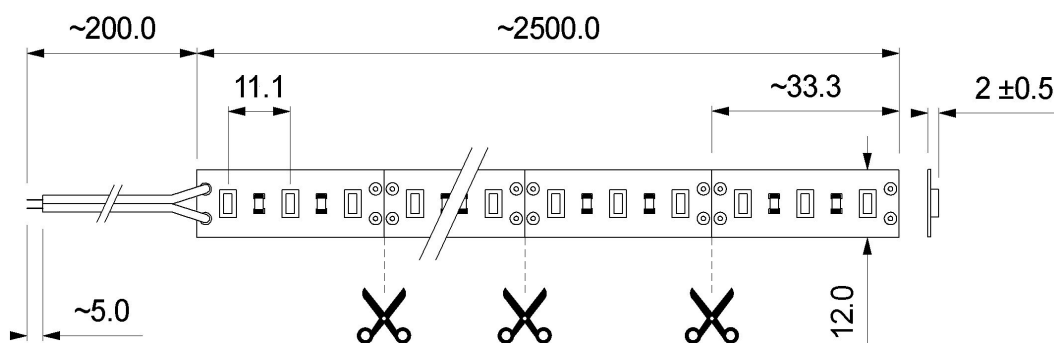

1. All dimensions are in millimetres
2. Length tolerance $\pm 1\%$
3. All strandet wires cross section 0.2mm² AWG #24
4. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**