

Flexiprint IP20

2835, single colour, ultra high bright

FP6-x01D-250

Specifications

Voltage	24V
Current	2.7A
Wattage	26W/m
Number of LEDs	315pcs
Length of stripe	2.5m
Viewing angle	120°
Min. bending radius (edges/corners)	30mm
Operating temperature	-15 to +40°C
Storage temperature	-25 to +60°C
CE/RoHS compliant	




Benefits

Adhesive tape on backside
Cutttable every ~56mm

Electrical and optical characteristics (Ta=25°C)

Part number	Colour	CCT	Intensity lm/m	EEC
FP6-N01D-250	 warm-white	2800-3500°K	3402	E
FP6-S01D-250	 natural-white	3800-5000°K	3528	E
FP6-W01D-250	 cold-white	5500-7000°K	3528	E

Dimensions

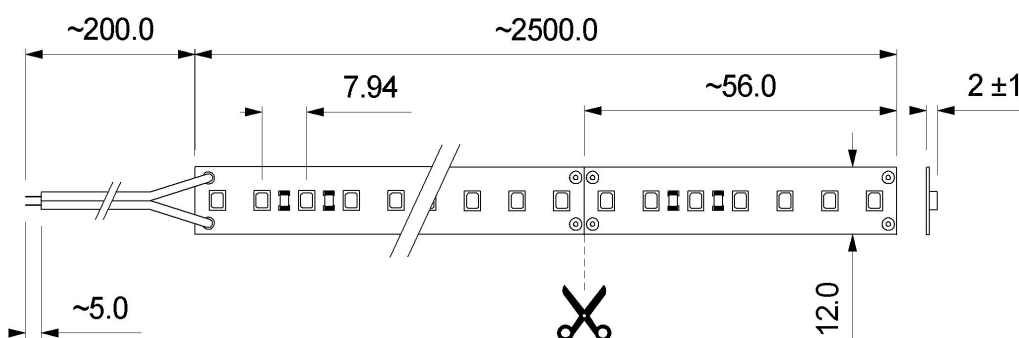

1. All dimensions are in millimetres
2. Length tolerance $\pm 1\%$
3. All strandet wires cross section 0.2mm² AWG #24
4. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**