

Flexiprint IP20

3528 PLCC2, single colour, standard bright, high density

FP7-x01D-250

Specifications

Voltage	24V
Current	1.88A
Wattage	18W/m
Number of LEDs	570pcs
Length of stripe	2.5m
Viewing angle	120°
Min. bending radius (edges/corners)	30mm
Operating temperature	-15 to +40°C
Storage temperature	-25 to +60°C
CE/RoHS compliant	




Benefits

Adhesive tape on backside
Cutable every ~26.3mm

Electrical and optical characteristics (Ta=25°C)

Part number	Colour	CCT	Intensity lm/m	EEC
FP7-N01D-250	 warm-white	2800-3500°K	1778	F
FP7-S01D-250	 natural-white	3800-5000°K	1892	F
FP7-W01D-250	 cold-white	5500-7000°K	1892	F

Dimensions

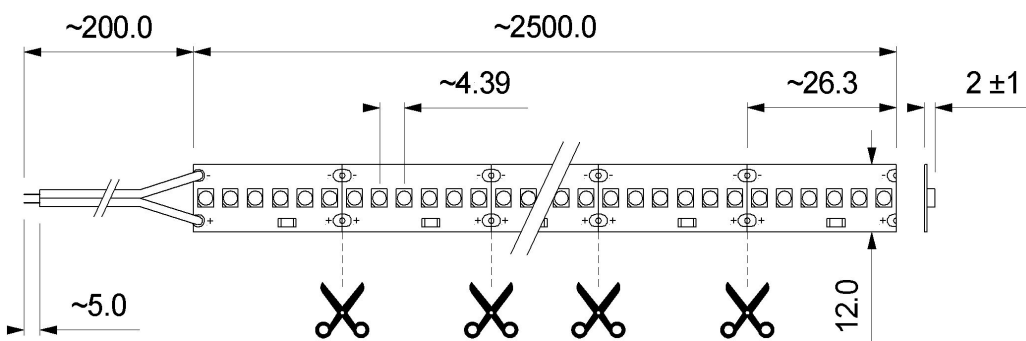

1. All dimensions are in millimetres
2. Length tolerance $\pm 1\%$
3. All strandet wires cross section 0.2mm² AWG #24
4. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**