


12V Flexiprint curved

Standard bright (2835)

FPC-x01B-250

Specifications



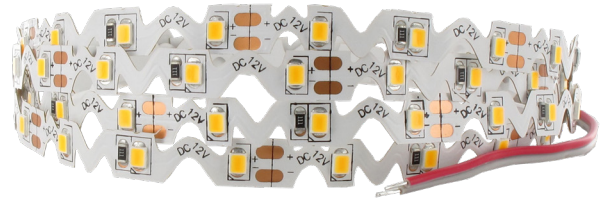

| | |
|-----------------------|------------|
| Voltage | 12V |
| Current | 1.5A |
| Wattage | 7.2W/m |
| Number of LED's | 150pcs |
| Length of stripe | 2.5m |
| Operating temperature | -15°~+40°C |
| Storage temperature | -40°~+80°C |
| Viewing angle | 120° |
| CE/RoHS compliant | |




Benefits

Adhesive tape on backside
cuttable every ~50mm

Electrical and optical characteristics (Ta=25°C)

| Part number | Colour | Wavelength / CCT | Intensity lm (typ.) | EEC |
|--------------|---|------------------|---------------------|-----|
| FPC-H01B-250 |  warm-white | 2600-2800°K | 1500 | A |
| FPC-N01B-250 |  warm-white | 2800-3100°K | 1500 | A+ |
| FPC-S01B-250 |  natural-white | 3800-5000°K | 1625 | A+ |
| FPC-W01B-250 |  white | 5500-6700°K | 1750 | A+ |


Dimensions

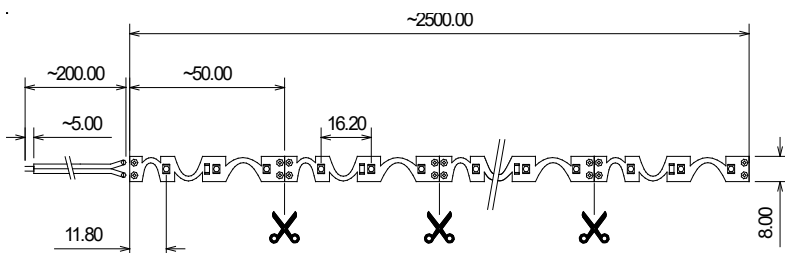

Thickness: 2.4 mm

Additional:

Quick connector for a solderless connection with the LED stripe.
Part-no.: SLO-C310-00001 (more details on page 47)

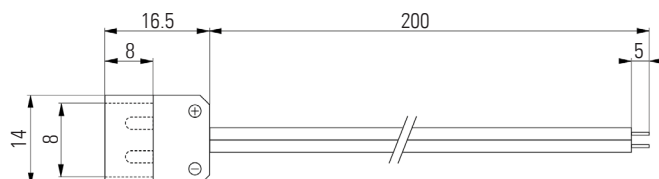

1. All dimensions are in millimetres
2. Tolerance is ± 0.50 mm unless otherwise specified
3. Length tolerance $\pm 1\%$
4. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**