

12V Flexiprint curved

High bright (PLCC6)

FPC3-x01B-250

Specifications





Voltage	12V
Current	1.5A
Wattage	7.2W/m
Number of LED's	150pcs
Length of stripe	2.5m
Operating temperature	-15°~+40°C
Storage temperature	-40°~+80°C
Viewing angle	120°
CE/RoHS compliant	




Benefits

Adhesive tape on backside
cuttable every ~100mm

Electrical and optical characteristics (Ta=25°C)


Part number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FPC3-H01B-250	 warm-white	2600-2800°K	1500	A
FPC3-N01B-250	 warm-white	2800-3100°K	1500	A+
FPC3-S01B-250	 natural-white	3800-5000°K	1625	A+
FPC3-W01B-250	 white	5500-6700°K	1750	A+

Dimensions

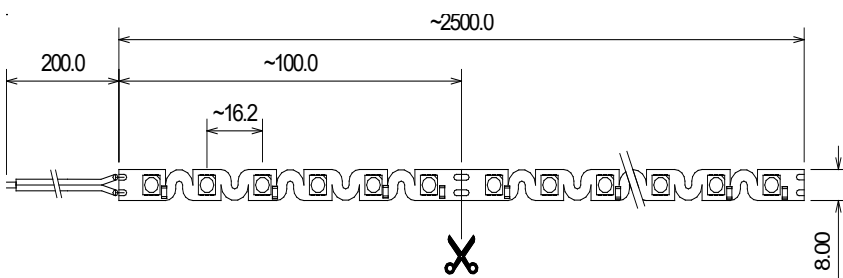

Additional:

Quick connector for a solderless connection with the LED stripe.
Part-no.: SLO-C310-00001 (more details on page 47)

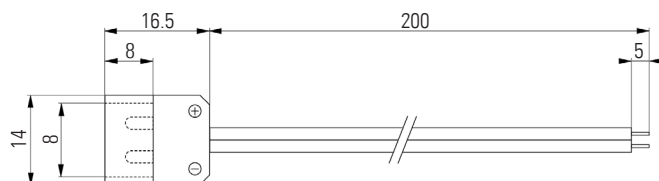

1. All dimensions are in millimetres
2. Tolerance is ± 0.50 mm unless otherwise specified
3. Length tolerance $\pm 1\%$
4. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**