

## 12V Flexiprint silicone IP64

Standard bright (PLCC2)

**FPL-x04B-500**

### Specifications









Voltage	12V
Current	2A
Wattage	4.8W/m
Number of LED's	300pcs
Length of stripe	5m
Operating temperature	-15°~+40°C
Storage temperature	-25°~+60°C
Viewing angle	110°
CE/RoHS compliant	



### Benefits


Adhesive tape on backside  
IP64 protection

### Electrical and optical characteristics (Ta=25°C)

Part number	Colour	Wavelength / CCT	Intensity lm (typ.)	EEC
FPL-B04B-500	 blue	472nm	110	E
FPL-G04B-500	 green	525nm	450	C
FPL-H04B-500	 warm-white	2600-2800°K	2100	A
FPL-N04B-500	 warm-white	2800-3100°K	2100	A
FPL-R04B-500	 red	639nm	240	E
FPL-S04B-500	 natural-white	3800-5000°K	2400	A+
FPL-W04B-500	 white	5500-7000°K	2400	A+
FPL-Y04B-500	 yellow	590nm	200	E

the reduction of light output for IP64 products is about -10%, due to silicone is acting as a filter

### Dimensions

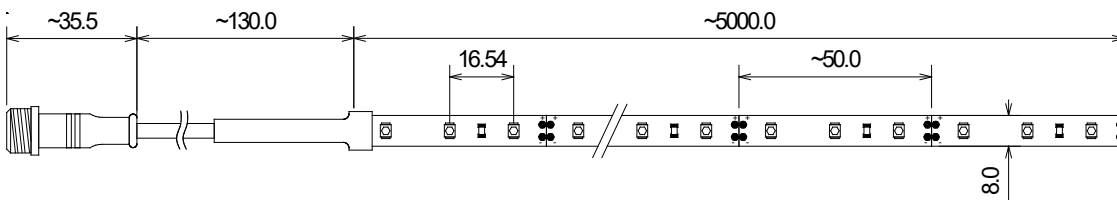

Thickness: 3 mm +1  
Thickness endings: 6.7 mm  
DC-Power Jack: internal Ø 2.1 mm / external Ø: 5.5 mm

**IP64:** Protection against temporary immersion  
No protection against UV, salt water/smog and chlorine!  
Not designed for submersion or outdoor usage!  
IP protection is no longer applicable after cutting!

1. All dimensions are in millimetres
2. Tolerance is ±0.50mm unless otherwise specified
3. Length tolerance ±1%
4. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**