

THT LED

Ø 3mm green

- high luminosity
- long lifetime up to 75'000 hours
- high quality for professional application
- RoHS compliant



Part Number	Old Part Number	Peak Wavelength	Intensity (mcd)			Angle (deg)	Voltage (V)		Lens Colour	Type
			min	typ	max		typ	max		
SLO-233G-00014	L3-G41N-GVW	● 522nm	24640	36100	49500	15°	3.2	3.6	waterclear	1
SLO-233G-00015	L3-G51N-GUV	● 522nm	7400	10800	14800	30°	3.2	3.5	waterclear	2
SLO-233G-00009	L3-G310-1	● 555nm	14	30	-	35°	2.1	2.6	waterclear	3
SLO-233G-00006	L3-G301	● 568nm	22	-	55	50°	2.2	2.6	diffused	4

Electro-Optical-Characteristics Ta=25°C, Forward Current: IF Typical = 20mA,

1/10 Duty Cycle, 10ms Pulse Width: up to 110mA, depending on type number.


Storage Temp. -40 ~+100 (°C) Operating Temp. -30 ~+85 (°C)

Detailed data sheets are available on request

Packaging: 500pcs/bulk

Dimensions (mm)

Type 1 - 4

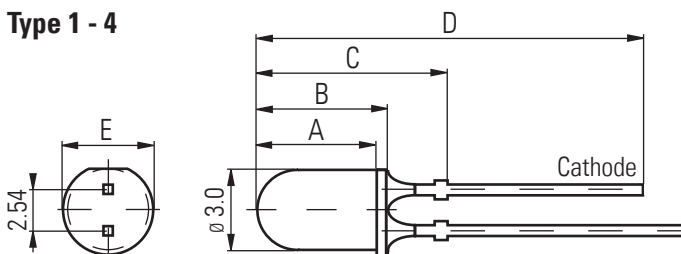

Type	A	B	C	D	E
1	5.0	6.0	11.0	27.5	3.8
2	4.4	5.4	10.4	26.9	3.8
3	4.0	4.7	NA	32.0	3.8
4	4.5	5.3	NA	30.7	3.8

1. All dimensions are in millimetres
2. Tolerance is ± 0.25 mm unless otherwise specified
3. Specifications are subject to change without notice