




THT LED

Ø 5mm flashing

- flashing frequency 2.5-1.5Hz
- power dissipation 200mW
- RoHS compliant



Part Number	Old Part Number	Peak Wavelength	Intensity (mcd)			Angle (deg)	Voltage (V)		Lens Colour	Type
			min	typ	max		min	max		
SLO-234G-00006	L5-G5FF	 565nm	5	-	32	60°	3.5	13	diffused	1
SLO-234R-00004	L5-R5FF	 625nm	20	-	80	60°	3.5	13	diffused	1
SLO-234Y-00003	L5-Y5FF	 590nm	5	-	32	60°	3.5	13	diffused	1


Electro-Optical-Characteristics Ta=25°C, Forward Current: IF Typical = 38-56mA,
Storage Temp. -50 ~+100 (°C) Operating Temp. -40 ~+70 (°C)

Detailed data sheets are available on request

Packaging: 500pcs/bulk

Dimensions (mm)

Type 1

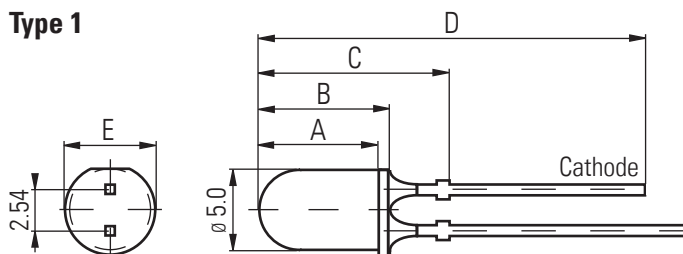

Type	A	B	C	D	E
1	7.6	8.6	NA	35.6	5.9

1. All dimensions are in millimetres
2. Tolerance is ± 0.25 mm unless otherwise specified
3. Specifications are subject to change without notice