

THT LED

Ø 5mm warm-white

- high luminosity
- long lifetime up to 75'000 hours
- high quality for professional application
- RoHS compliant



| Part Number | Old Part Number | Colour Temp. (°K) | Intensity (mcd) | | | Angle (deg) | Voltage (V) | | Lens Colour | Type |
|----------------|-----------------|-------------------|-----------------|-------|-------|-------------|-------------|-----|-------------|------|
| | | | min | typ | max | | typ | max | | |
| SLO-234N-00003 | L5-N55N-FUV | ☉ 2500-3500 | 15500 | 22000 | 31000 | 15° | 3.2 | 3.5 | waterclear | 1 |
| SLO-234N-00001 | L5-N52N-FTU | ☉ 2500-3500 | 3000 | 4700 | 6000 | 50° | 3.2 | 3.5 | waterclear | 2 |

Electro-Optical-Characteristics Ta=25°C, Forward Current: IF Typical = 20mA,

1/10 Duty Cycle, 10ms Pulse Width: up to 110mA, depending on type number.


Storage Temp. -40 ~+100 (°C) Operating Temp. -30 ~+85 (°C)

Detailed data sheets are available on request

Packaging: 500pcs/bulk

Dimensions (mm)

Type 1 - 2

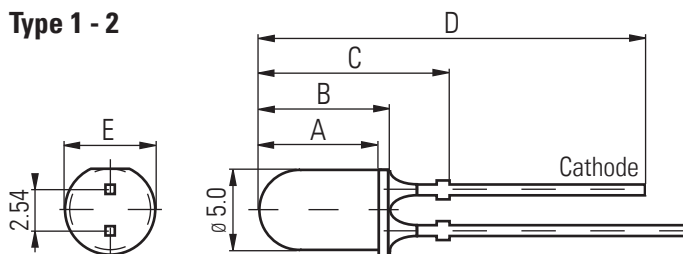

| Type | A | B | C | D | E |
|------|-----|-----|------|------|-----|
| 1 | 7.6 | 8.6 | 12.4 | 28.9 | 5.6 |
| 2 | 7.3 | 8.3 | 12.1 | 28.6 | 5.6 |