

THT LED spacer

for Ø 3 + 5mm

- temperature resistance of approx. 140°C
- material: polycarbonat (PC) and glass fibre (GF)
- colour: grey
- RoHS compliant

This product contains the substance of very high concern
(REACH Regulation (EC) No 1907/2006 Art. 59):


Potassium Perfluorobutanesulfonate - CAS No. 29420-49-3 - EC No. 249-616-3



3mm LED Spacers

Part No. Length (mm)


546.71.03	3.0
546.71.04	4.0
546.71.05	5.0
546.71.06	6.0
546.71.07	7.0
546.71.08	8.0
546.71.09	9.0
546.71.10	10.0
546.71.11	11.0
546.71.12	12.0
546.71.13	13.0
546.71.14	14.0
546.71.15	15.0
546.71.16	16.0
546.71.17	17.0
546.71.18	18.0
546.71.19	19.0
546.71.20	20.0
546.71.21	21.0
546.71.22	22.0
546.71.23	23.0
546.71.24	24.0
546.71.25	25.0

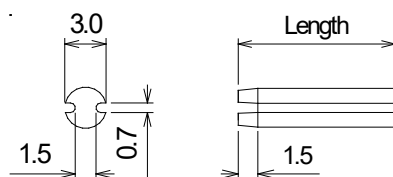

5mm LED Spacers

Part No. Length (mm)

325.71.02	2.0
325.71.03	3.0
325.71.04	4.0
325.71.05	5.0
325.71.06	6.0
325.71.07	7.0
325.71.08	8.0
325.71.09	9.0
325.71.10	10.0
325.71.11	11.0
325.71.12	12.0
325.71.13	13.0
325.71.14	14.0
325.71.15	15.0
325.71.16	16.0
325.71.17	17.0
325.71.18	18.0
325.71.19	19.0
325.71.20	20.0
325.71.21	21.0
325.71.22	22.0
325.71.23	23.0
325.71.24	24.0
325.71.25	25.0



1. All dimensions are in millimetres
2. Tolerance is ± 0.10 mm unless otherwise specified
3. Specifications are subject to change without notice