

## THT LED

Ø 3mm blue

- high luminosity
- long lifetime up to 75'000 hours
- high quality for professional application
- RoHS compliant



Part Number	Old Part Number	Peak Wavelength	Intensity (mcd)			Angle (deg)	Voltage (V)		Lens Colour	Type
			min	typ	max		typ	max		
SLO-233B-00003	L3-B41G-WTU	● 462nm	1380	2500	2760	30°	3.2	3.5	waterclear	2
SLO-233B-00004	L3-B71G-WVV	● 470nm	4400	6220	8750	15°	3.2	3.5	waterclear	1

### Electro-Optical-Characteristics Ta=25°C, Forward Current: IF Typical = 20mA,


1/10 Duty Cycle, 10ms Pulse Width: up to 110mA, depending on type number.

Storage Temp. -40 ~+100 (°C) Operating Temp. -30 ~+85 (°C)

Detailed data sheets are available on request

Packaging: 500pcs/bulk

### Dimensions (mm)

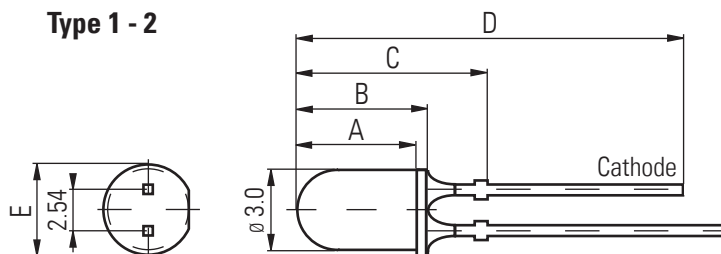

Type	A	B	C	D	E
1	5.0	6.0	11.0	27.5	3.8
2	4.4	5.4	10.4	26.9	3.8

1. All dimensions are in millimetres
2. Tolerance is ±0.25mm unless otherwise specified
3. Specifications are subject to change without notice